



PYROS BLOCK LED

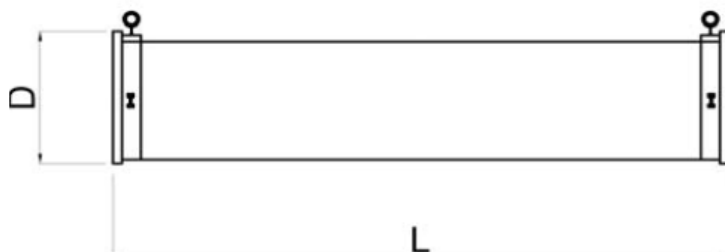

APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES



IT - DE



RG1

MACADAM

3/4

UGR
<19

CR>80

L70B50
>
50.000


IP66
IK10

CE

2014/34/EU

Ex

II2GD
Ex db IIC T6 Gb
Ex tb IIIC T85°Db



Ref.	Fuente de luz Light source Source de lumière	Autonomía Battery life Autonomie	Mantenido Non mantenido	L	D	Embalaje Packaging Emballage
	(lm)			(mm)	(mm)	
EXZ10	500	1H	NM	440	173	1
EXZ11	2100 / 800	1H	M / NM	440	173	1
EXZ12	800	1H	NM	750	173	1
EXZ13	4300 / 950	1H	M / NM	750	173	1
EXZ14	4300 / 750	1H	M / NM	1.357	173	1
EXZ15	500	3H	NM	440	173	1
EXZ16	800	3H	NM	440	173	1
EXZ17	9500	3H	NM	1.357	173	1
EXZ18	4300 / 750	3H	M / NM	750	173	1
EXZ19	4300 / 750	3H	M / NM	1.357	173	1