

1.4





RINOX





Brida
Clamp
Collier



ANTIVANDÁLICA / ANTIVANDALISM / ANTIVANDALISME



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

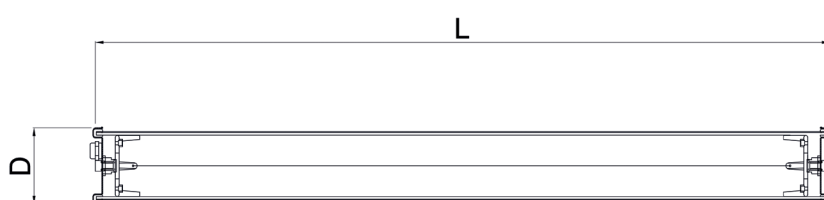

IT - DE

IK10

IP69K

CE

EN 60598-1




TUBO FLUORESCENTE / LAMP / LAMPE


T8

Ref.	Potencia Watts Puissance	Equipo Equipment Ballast	L	D	D + brida D + clamp D+fixations	Embalaje Packaging Emballage
	(W)		(mm)	(mm)	(mm)	
Q0511	1 x 18	■	683	100	120	1
Q0513	1 x 36	■	1.293	100	120	1
Q0515	1 x 58	■	1.593	100	120	1
Q0517	2 x 18	■	683	100	120	1
Q0519	2 x 36	■	1.293	100	120	1
Q0521	2 x 58	■	1.593	100	120	1

■ Electrónica / Electronic / Électronique

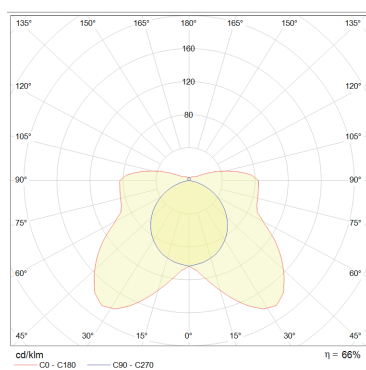

1x

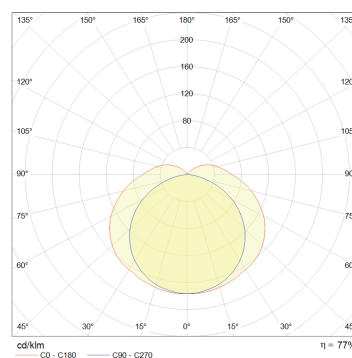

2x

1.4


RINOX

TUBO FLUORESCENTE / LAMP / LAMPE


T5

Ref.	Potencia Watts Puissance	Equipo Equipment Ballast	L	D	D + brida D + clamp D+fixations	Embalaje Packaging Emballage
	(W)		(mm)	(mm)	(mm)	
Q0525	1 x 14	■	643	100	120	1
Q0533	1 x 24	■	643	100	120	1
Q0527	1 x 21	■	942	100	120	1
Q0535	1 x 39	■	942	100	120	1
Q0529	1 x 28	■	1.242	100	120	1
Q0539	1 x 54	■	1.242	100	120	1
Q0531	1 x 35	■	1.542	100	120	1
Q0537	1 x 49	■	1.542	100	120	1
Q0541	1 x 80	■	1.542	100	120	1
Q0543	2 x 14	■	643	100	120	1
Q0551	2 x 24	■	643	100	120	1
Q0545	2 x 21	■	942	100	120	1
Q0553	2 x 39	■	942	100	120	1
Q0547	2 x 28	■	1.242	100	120	1
Q0557	2 x 54	■	1.242	100	120	1
Q0549	2 x 35	■	1.542	100	120	1
Q0555	2 x 49	■	1.542	100	120	1

■ Electrónica / Electronic / Électronique

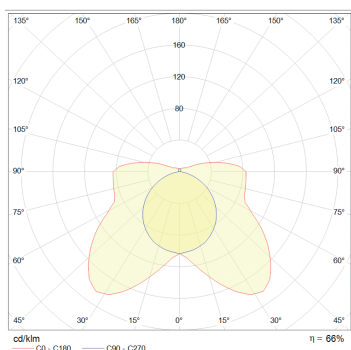

1x

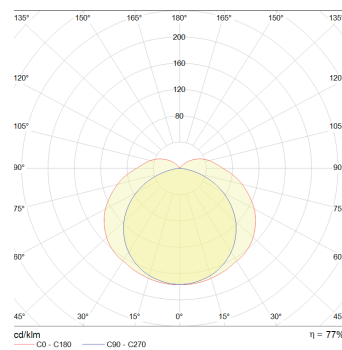

2x

ALTAS TEMPERATURAS / HIGH TEMPERATURES / HAUTES TEMPÉRATURES



T8

Ref.	Potencia Watts Puissance	Equipo Equipment Ballast	L	D	D + brida D + clamp D + fixations	Embalaje Packaging Emballage
	(W)		(mm)	(mm)	(mm)	
Q0559	1 x 18		683	100	120	1
Q0560	1 x 36		1.293	100	120	1
Q0561	1 x 58		1.593	100	120	1
Q0562	2 x 18		683	100	120	1
Q0563	2 x 36		1.293	100	120	1
Q0564	2 x 58		1.593	100	120	1



2 X 36

2 X 58

Manguera de unión: 50 cm
Union hose: 50 cm
Câble d'union: 50 cm

RINOX LED

TUBO LED / LED TUBE / TUBE LED


Ref.	Longitud tubo Tube lenght Longueur tube	L	D	D + brida D + clamp D + fixations	Embalaje Packaging Emballage
	(mm)	(mm)	(mm)	(mm)	
Q0511L	1 x 600	683	100	120	1
Q0513L	1 x 1.200	1.293	100	120	1
Q0515L	1 x 1.500	1.593	100	120	1
Q0517L	2 x 600	683	100	120	1
Q0519L	2 x 1.200	1.293	100	120	1
Q0521L	2 x 1.500	1.593	100	120	1

1.4

RINOX

ACCESORIOS RINOX / RINOX ACCESORIES / ACCESSOIRES RINOX

RINOX OPAL

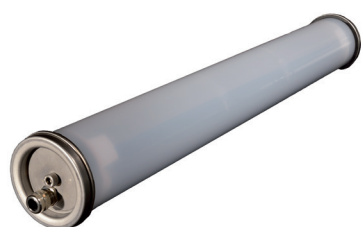

Ref.

Potencia
Watts
Puissance

(W)

Ref luminaria + "O". Ej.: Q05110

Light fitting ref + "O". Ex.: Q05110

Ref luminaire + "O". Ex.: Q05110

18

36

58

14-24

21-39

28-54

35-49-80



Ref.

Q0349

Suspensión con cable
de acero
Steel cable suspension
Suspension avec câble
en acier




Q0656

Bridas de acero
inoxidable con
protección de caucho
Stainless steel clamps
Colliers inox antivanda-
lisme



Q0159

Bridas de acero cincado
Zinc-plated steel
clamps
Colliers en acier galva-
nisé



Q0153

Brida de policarbonato
Polycarbonate clamp
Colliers en polycarbo-
nate



Q0657

Tapa acero INOX 316
Stainless Steel 316 end
caps
Embouts INOX 316

LÍNEA CONTINUA
CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles

Ref Q0565

5 polos / 5 poles / 5 pôles

Ref. Q0566

1-10
DALI

EMERGENCY
1h / 3h

	Cuerpo luminaria tubo policarbonato Polycarbonate luminaire body Corps du luminaire tube polycarbonate		Cuerpo extrusion Aluminum body Corps aluminium		Rango de temperaturas Temperatures range Tranche de temperatures
	Cuerpo luminaria metacrilato Methacrylate luminaire body Corps du luminaire méthacrylate		Cuerpo Acero Prelacado Pre-lacquered steel body Corps en acier prélaqué		Ensayo hilo Glow wire test Essais fil incandescent
	Cuerpo luminaria vidrio borosilicato Glass borosilicate luminaire body Corps du luminaire verre borosilicate		Cuerpo Aluminio Prelacado Pre-lacquered aluminum body Corps en aluminium prélaqué		Alto factor High Factor Hautes temperatures
	Cuerpo luminaria ABS ABS luminaire body Corps du luminaire ABS		Cuerpo ABS ABS body Corp ABS		Conector rápido Quick Connector Connecteur rapide
	Cuerpo luminaria poliestireno Polystyrene luminaire body Corps du luminaire polystyrène		Difusor Policarbonato Polycarbonate Diffuser Diffuseur Polycarbonate		Entrada cablesroca M25 (2e) M25 Cable entry (2e) Entrée de câbles a vis M25 (2e)
	Cuerpo aluminio Extrusion Aluminum Body Corps extrusión aluminium		Difusor Policarbonato Opal Opal Polycarbonate Diffuser		Regulación de flujo Dimmable equipment Ballast gradable
	Cuerpo hierro Iron body Corps fer		Difusor Poliestireno Polystyrene Diffuser Diffuseur Polystyrène		Módulo LED LED Module Modules LED
	Tapas Aluminio pintado Painted Aluminum end caps Embouts aluminium peint		Difusor PC/ACRIL PC/ACRIL Diffuser Diffuseur PC/ACRIL		Tubo LED LED Tube Tube LED
	Tapa acero INOX Stainless Steel 304 end caps Embouts INOX 304		Lamas ABS ABS louvers Lames ABS		Tubo fluorescencia Fluorescent Tube Tube Fluorescent
	Tapa acero INOX Stainless Steel 316 end caps		Lamas ABS - PC ABS - PC louvers Lames ABS - PC		Tubo LED o Tubo fluorescente LED Tube or fluorescent tube Tube LED ou Tube fluorescent
	Tapas ABS ABS Plastic end caps Embouts PLASTIQUE ABS		Abrazaderas acero cincado Galvanized Steel Clamps Fixations acier zingué		Fuente de luz Light source Source de lumière
	Tapas Policarbonato PC Plastic end caps Embouts PLASTIQUE PC		Abrazaderas acero inox Stainless Steel Clamps Fixations INOX		Fuente de luz Light source Source de lumière
	Tapas Plástico Metalizado Metalized Plastic end caps Embouts PLASTIQUE CHROMÉ		Abrazaderas cierre rápido Quick opening stainless steel Fixations INOX ouverture à grenouillère		Fuente de luz Light source Source de lumière
	Tapas Zamak Niquelado Nickel-plated ZAMAK end caps Embouts ZAMAK NICKELÉ		Abrazaderas PC antivandálica Vandalism PC Clamps Fixations INOX ouverture à grenouillère		Zona ATEX EX Area ATEX Zone
	Tapas acero niquelado Nickel-plated steel end caps Embouts Acier Nickelé		Abrazaderas ABS ABS Clamps Fixations PMMA antivandalisme		Sistema de emergencia Emergy Sistem Système d'urgence
	Aluminio Anodizado Anodized aluminum Aluminium anodisé		Aro ABS ABS Ring Fixations ABS		Grupo de riesgo fotobiológico Photobiological risk group Group de risque fotobiologique
	Reflector Aluminio brillo Reflector Aluminum Gloss Réflecteur Aluminium brillant		Abrazaderas techo o pared Ceiling or wall Clamps Fixations murs et parois		Índice MacAdam MacAdam Ellipse Taux MacAdam
	Reflector chapa lacada blanca White lacquered steel Reflector Réflecteur tôle lacquée blanc		Prensaestopa Cable Gland Presse étoupes		Índice de deslumbramiento unificado Unify glare rating Taux d'éblouissement
	Reflector acero lacado blanco White Lacquered Steel Reflector Réflecteur acier lacqué blanc		Empotrable para lámpara Embedded for lamps Encastrable pour lamp		Índice cromático Chromatic Index Taux chromatique
	Reflector acero galvanizado Galvanized Steel Reflector Réflecteur acier galvanisé		Brida suspensión perforación18mm Clamps suspension borehole 18 mm Fixation avec suspension perforation 18 mm		Vida útil Useful life Durée de vie