


1.16


TR2



Brida
Clamp
Collier



LED/FLUO




PMMA




RAB/BAR/RAB




ZAMAK-Ni



AC/GS/ZM






PG11



675°

APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

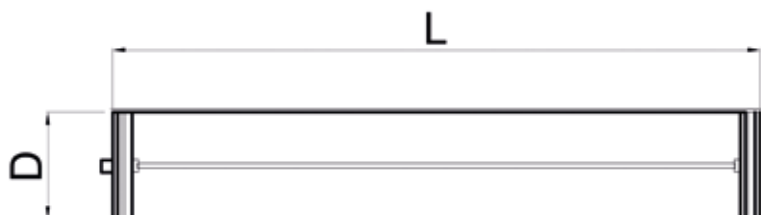

IT - DE



IK10

IP68-2

CE

EN 60598-1




TUBO FLUORESCENTE / LAMP / LAMPE


T8

Ref.	Potencia Watts <i>Puissance</i>	Equipo Equipment <i>Ballast</i>	L	D	D + brida D + clamp <i>D + fixations</i>	Embalaje Packaging <i>Emballage</i>
	(W)		(mm)	(mm)	(mm)	
Q0435	1 x 18	■	709	100	133	1
Q0436	1 x 36	■	1.319	100	133	1
Q0437	1 x 58	■	1.624	100	133	1
Q0438	2 x 18	■	709	100	133	1
Q0439	2 x 36	■	1.319	100	133	1
Q0440	2 x 58	■	1.624	100	133	1

■ Electrónica / Electronic / Électronique



1x





2x

1.16

TR2

TUBO FLUORESCENTE / LAMP / LAMPE

T5



Ref.	Potencia Watts Puissance	Equipo Equipment Ballast	L	D	D + brida D + clamp D + fixations	Embalaje Packaging Emballage
	(W)		(mm)	(mm)	(mm)	
Q0451	1 x 14	■	671	100	133	1
Q0487	1 x 24	■	671	100	133	1
Q0452	1 x 21	■	966	100	133	1
Q0455	1 x 39	■	966	100	133	1
Q0453	1 x 28	■	1.272	100	133	1
Q0456	1 x 54	■	1.272	100	133	1
Q0454	1 x 35	■	1.574	100	133	1
Q0488	1 x 49	■	1.574	100	133	1
Q0489	1 x 80	■	1.574	100	133	1
Q0457	2 x 14	■	671	100	133	1
Q0490	2 x 24	■	671	100	133	1
Q0458	2 x 21	■	966	100	133	1
Q0461	2 x 39	■	966	100	133	1
Q0459	2 x 28	■	1.272	100	133	1
Q0462	2 x 54	■	1.272	100	133	1
Q0460	2 x 35	■	1.574	100	133	1
Q0491	2 x 49	■	1.574	100	133	1

■ Electrónica / Electronic / Électronique

TUBO LED / LED TUBE / TUBE LED

T8

Ref.	Longitud Tubo Tube Length Longueur Tube	L	D	D + brida D + clamp D + fixations	Embalaje Packaging Emballage
	(mm)	(mm)	(mm)	(mm)	
Q0435L	1 x 600	675	100	133	1
Q0436L	1 x 1.200	1.285	100	133	1
Q0437L	1 x 1.500	1.589	100	133	1
Q0438L	2 x 600	675	100	133	1
Q0439L	2 x 1.200	1.285	100	133	1
Q0440L	2 x 1.500	1.589	100	133	1

IK10

IP68-2

CE

EN 60598-1



ALTAS TEMPERATURAS
 HIGH TEMPERATURES
 HAUTES TEMPÉRATURES



T8

Ref.	Potencia Watts Puissance	Equipo Equipment Ballast	L	D	D + brida D + clamp D + fixations	Embalaje Packaging Emballage
	(W)		(mm)	(mm)	(mm)	
Q0471	1 x 18		709	100	133	1
Q0472	1 x 36		1.319	100	133	1
Q0473	1 x 58		1.624	100	133	1
Q0474	2 x 18		709	100	133	1
Q0475	2 X 36		1.319+ 671	100	133	1
Q0476	2 X 58		1.624+ 671	100	133	1



1 x 18

1 x 36

1 x 58

2 x 18



2 X 36

2 X 58

Manguera de unión: 50 cm
 Union hose: 50 cm
 Câble d'union: 50 cm

1.16

TR2

ACCESORIOS TR2 / TR2 ACCESSORIES / ACCESSOIRES TR2

TR2 OPAL

Ref.	Potencia Watts Puissance (W)
 Ref luminaria + "O". Ej.: Q06010 Light fitting ref + "O". Ex.: Q06010 <i>Ref luminaire + "O". Ex.: Q06010</i>	18
	36
	58
	14-24
	21-39
	28-54
	35-49-80

 Ref. Q0401 Bridas de acero inoxidable Stainless steel clamps <i>Colliers inox antivandalisme</i>	 Ref. Q0402 Bridas de acero inoxidable de apertura rápida Quick opening stainless steel clamps <i>Colliers inox de ouverture rapide à grenouillère</i>	 Ref. Q0158 Brida de metacrilato Antivandalic acrylic <i>Colliers en méthacrylate</i>
--	---	--

 Ref. Q0349 Suspensión con cable de acero Steel cable suspension <i>Suspension avec câble en acier</i>	 Ref. Q0160 Válvula anticondensación y de equilibrado de presión Anticondensation valve and pressure balancing <i>Valve anti-condensation et équilibrage de pression</i>	 Ref. Q0147 Pieza anticavitación Anticavitation piece <i>Kit anti-cavitation</i>
---	---	---

LÍNEA CONTINUA CONTINUOUS LINE CONNECTION <i>CÂBLAGE TRAVERSANT</i>	3 polos / 3 poles / 3 pôles	Ref. Q0404
	5 polos / 5 poles / 5 pôles	Ref. Q0406

1-10 DALI	EMERGENCY 1h / 3h
---------------------------------	-----------------------------

	Cuerpo luminaria tubo policarbonato Polycarbonate luminaire body Corps du luminaire tube polycarbonate		Cuerpo extrusion Aluminum body Corps aluminium		Rango de temperaturas Temperatures range Tranche de temperatures
	Cuerpo luminaria metacrilato Methacrylate luminaire body Corps du luminaire méthacrylate		Cuerpo Acero Prelacado Pre-lacquered steel body Corps en acier prélaqué		Ensayo hilo Glow wire test Essais fil incandescent
	Cuerpo luminaria vidrio borosilicato Glass borosilicate luminaire body Corps du luminaire verre borosilicate		Cuerpo Aluminio Prelacado Pre-lacquered aluminum body Corps en aluminium prélaqué		Alto factor High Factor Hautes temperatures
	Cuerpo luminaria ABS ABS luminaire body Corps du luminaire ABS		Cuerpo ABS ABS body Corp ABS		Conector rápido Quick Connector Connecteur rapide
	Cuerpo luminaria poliestireno Polystyrene luminaire body Corps du luminaire polystyrène		Difusor Policarbonato Polycarbonate Diffuser Diffuseur Polycarbonate		Entrada cablesroca M25 (2e) M25 Cable entry (2e) Entrée de câbles a vis M25 (2e)
	Cuerpo aluminio Extrusion Aluminum Body Corps extrusión aluminium		Difusor Policarbonato Opal Opal Polycarbonate Diffuser Diffuseur Polycarbonate Opal		Regulación de flujo Dimmable equipment Ballast gradable
	Cuerpo hierro Iron body Corps fer		Difusor Poliestireno Polystyrene Diffuser Diffuseur Polystyrène		Módulo LED LED Module Modules LED
	Tapas Aluminio pintado Painted Aluminum end caps Embouts aluminium peint		Difusor PC/ACRIL PC/ACRIL Diffuser Diffuseur PC/ACRIL		Tubo LED LED Tube Tube LED
	Tapa acero INOX Stainless Steel 304 end caps Embouts INOX 304		Lamas ABS ABS louvers Lames ABS		Tubo fluorescencia Fluorescent Tube Tube Fluorescent
	Tapa acero INOX Stainless Steel 316 end caps		Lamas ABS - PC ABS - PC louvers Lames ABS - PC		Tubo LED o Tubo fluorescente LED Tube or fluorescent tube Tube LED ou Tube fluorescent
	Tapas ABS ABS Plastic end caps Embouts PLASTIQUE ABS		Abrazaderas acero cincado Galvanized Steel Clamps Fixations acier zingué		Fuente de luz Light source Source de lumière
	Tapas Policarbonato PC Plastic end caps Embouts PLASTIQUE PC		Brazaderas acero inox Stainless Steel Clamps Fixations INOX		Fuente de luz Light source Source de lumière
	Tapas Plástico Metalizado Metalized Plastic end caps Embouts PLASTIQUE CHROMÉ		Abrazaderas cierre rápido Quick opening stainless steel Fixations INOX ouverture à grenouillère		Fuente de luz Light source Source de lumière
	Tapas Zamak Niquelado Nickel-plated ZAMAK end caps Embouts ZAMAK NICKELÉ		Abrazaderas PC antivandálica Vandalism PC Clamps Fixations INOX ouverture à grenouillère		Zona ATEX EX Area ATEX Zone
	Tapas acero niquelado Nickel-plated steel end caps Embouts Acier Nickelé		Abrazaderas ABS ABS Clamps Fixations PMMA antivandalisme		Sistema de emergencia Emergency Sistem Système d'urgence
	Aluminio Anodizado Anodized aluminum Aluminium anodisé		Aro ABS ABS Ring Fixations ABS		Grupo de riesgo fotobiológico Photobiological risk group Group de risque photobiologique
	Reflector Aluminio brillo Reflector Aluminum Gloss Réflecteur Aluminium brillant		Abrazaderas techo o pared Ceiling or wall Clamps Fixations murs et parois		Índice MacAdam MacAdam Ellipse Taux MacAdam
	Reflector chapa lacada blanca White lacquered steel Reflector Réflecteur tôle lacquée blanc		Prensaestopa Cable Gland Presse étoupes		Índice de deslumbramiento unificado Unify glare rating Taux d'éblouissement
	Reflector acero lacado blanco White Lacquered Steel Reflector Réflecteur acier lacqué blanc		Empotrable para lámpara Embedded for lamps Encastrable pour lamp		Índice cromático Chromatic Index Taux chromatique
	Reflector acero galvanizado Galvanized Steel Reflector Réflecteur acier galvanisé		Brida suspensión perforación 18mm Clamps suspension borehole 18 mm Fixation avec suspension perforation 18 mm		Vida útil Useful life Durée de vie