






HIPEX



ANTIVANDÁLICA / ANTIVANDALISM / ANTIVANDALISME




APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES



Temperatura ambiente: -25 a +45°C.
Ambient working temperature: -25 a +45°C.
Température de travail : -25 a +45°C.

Prensaestopas ATEX M20 metálico para cable no armado.
M20 metallic ATEX cable gland for non armored cable.
Presse-étoupe M20 pour câble non armé.

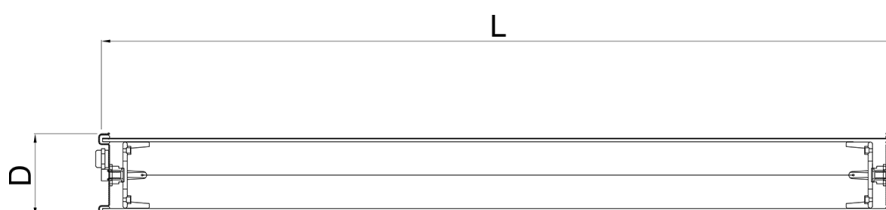




RG 0	MACADAM 3/4	UGR <19	CR>80	L80B50 > 72.000	IK10	IP69K	2014/34/EU Ex nR IIC T6 Gc Ex tc IIIC 85°C Dc
------	----------------	------------	-------	-----------------------	------	-------	---



Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión Neta Net output Flux sor- tant	Tª color Tª colour Tª couleur	L	D	D + brida D + clamp D + fixations	Embalaje Packaging Emballage
	(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
HI113	600	13	1.490	997	3.000	684	100	120	1
HI114	600	13	1.550	1.037	4.000	684	100	120	1
HI123	600	16	2.560	1.712	3.000	684	100	120	1
HI124	600	16	2.670	1.786	4.000	684	100	120	1
HI213	1200	24	2.980	1.993	3.000	1.368	100	120	1
HI214	1200	24	3.200	2.140	4.000	1.368	100	120	1
HI223	1200	32	5.120	3.424	3.000	1.368	100	120	1
HI224	1200	32	5.340	3.571	4.000	1.368	100	120	1
HI313	1500	29	3.720	2.488	3.000	1.653	100	120	1
HI314	1500	29	4.000	2.675	4.000	1.653	100	120	1
HI323	1500	40	6.310	4.220	3.000	1.653	100	120	1
HI324	1500	40	6.700	4.481	4.000	1.653	100	120	1

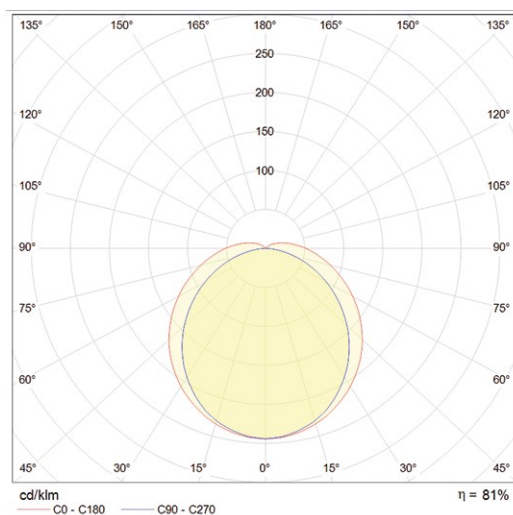



RG 0	MACADAM 3/4	UGR <19	CR>80	L80B50 > 72.000	IK10	IP69K	2014/34/EU Ex II 3GD Ex nR IIC T6 Gc Ex tc IIIC 85°C Dc
------	----------------	------------	-------	-----------------------	------	-------	--



ACCESORIOS HIPEX / HIPEX ACCESSORIES / ACCESSOIRES HIPEX



Ref. Q0349
Suspensión con cable de acero
Steel cable suspension
Suspension avec câble en acier



Ref. Q0401
Bridas de acero inoxidable
Stainless steel clamps
Colliers inox antivandalisme



Ref. Q0159
Bridas de acero cincado
Zinc-plated steel clamps
Colliers en acier galvanisé



Ref. Q0158
Brida de metacrilato
Antivandalic acrylic
Colliers en méthacrylate



Ref. Q0657
Tapa acero INOX 316
Stainless Steel 316 end caps
Embouts INOX 316



Ref. Q0156
Bridas rápidas acero inox. 304
Stainless steel clamps
Colliers inox



Ref. Q0982
Conector rápido 3 polos
3 poles fast connector
Connecteur rapide 3 pôles



Ref. Q0889
Conector rápido 5 polos
5 poles fast connector
Connecteur rapide 5 pôles

Ref. EX508
Prensaestopas ATEX M20 cable armado
Armored cable ATEX M20 cable gland
Presse-étoupe M20 pour câble armé.



Ref. Q0978
Sujeción a báculo
Pole adapter
Adaptateur de lampadaire



LÍNEA CONTINUA
CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles

Ref. Q0581

5 polos / 5 poles / 5 pôles

Ref. Q0582

DALI

EMERGENCY
1h/3h