

TECHNICAL DATA / DATOS TÉCNICOS

EXPLOSION PROTECTION / PROTECCIÓN CONTRA EXPLOSIONES

Zones	2 - 21/22	2 - 21/22
Gas explosion protection	ATEX: II 3G Ex ec IIC T4 Gc (-25...+55°C) II 3G Ex ec IIC T5 Gc (-25...+45°C) II 3G Ex ec IIC T6 Gc (-25...+30°C)	IECEx: Ex ec IIC T4 Gc (-25...+55°C) Ex ec IIC T5 Gc (-25...+45°C) Ex ec IIC T6 Gc (-25...+30°C)
Dust explosion protection	ATEX: II 2D Ex tb IIIC T85°C Db	IECEx: Ex tb IIIC T85°C Db

AMBIENT CONDITIONS / CONDICIONES AMBIENTALES

Ambient temperature - Temperatura ambiente	-25°C ... +55°C (Ver marcados ATEX / See ATEX marking above) -25°C ... +30°C with battery / con batería
--	--

LIGHTING DATA / DATOS LUMÍNICOS


Efficiency - Eficiencia (lm/W)	±170lm/W
Colour temperature - Temperatura de color	3.000K — 6.500K

MATERIAL REQUIRED FOR INSTALLATION / MATERIAL REQUERIDO PARA LA INSTALACIÓN


Cable gland - Prensaestopas	Non armored M20 cable gland - Prensaestopas M20 para cable no armado	Included Incluido
Clamps - Bidas	Ø 80 mm	Optional - see Accessories

MECHANICAL DATA / DATOS CONSTRUCTIVOS

Tube - Tubo	Opal
-------------	------



Ref.	Equiv.	(W)	(Lm)	(°K)	L (mm)	D (mm)	DALI supl.	Emerg. supl.(1h)	Emerg. supl.(3h)	Cont.lin 3p	Cont.lin 5p
HI114P	1X18W	13	1.550	4.000	685	100	DALSU1	0EM06	0EM08	Q0581	Q0582
HI124P	2X18W	17	2.885	4.000	685	100	DALSU1	0EM07	0EM09	Q0581	Q0582
HI214P	1X36W	24	3.200	4.000	1.300	100	DALSU1	0EM07	0EM09	Q0581	Q0582
HI224P	2X36W	40	6.954	4.000	1.300	100	DALSU1	0EM07	0EM09	Q0581	Q0582
HI314P	1X58W	29	4.000	4.000	1.600	100	DALSU1	0EM07	0EM09	Q0581	Q0582
HI324P	2X58W	65	10.990	4.000	1.600	100	DALSU1	0EM07	0EM09	Q0581	Q0582
HI115P	1X18W	13	1.456	5.000	685	100	DALSU1	0EM06	0EM08	Q0581	Q0582
HI125P	2X18W	17	2.867	5.000	685	100	DALSU1	0EM07	0EM09	Q0581	Q0582
HI215P	1X36W	24	3.192	5.000	1.300	100	DALSU1	0EM07	0EM09	Q0581	Q0582
HI225P	2X36W	40	6.909	5.000	1.300	100	DALSU1	0EM07	0EM09	Q0581	Q0582
HI315P	1X58W	29	3.990	5.000	1.600	100	DALSU1	0EM07	0EM09	Q0581	Q0582
HI325P	2X58W	65	10.920	5.000	1.600	100	DALSU1	0EM07	0EM09	Q0581	Q0582
HI116P	1X18W	13	1.512	6.500	685	100	DALSU1	0EM06	0EM08	Q0581	Q0582
HI126P	2X18W	17	2.828	6.500	685	100	DALSU1	0EM07	0EM09	Q0581	Q0582
HI216P	1X36W	24	3.149	6.500	1.300	100	DALSU1	0EM07	0EM09	Q0581	Q0582
HI226P	2X36W	40	6.816	6.500	1.300	100	DALSU1	0EM07	0EM09	Q0581	Q0582
HI316P	1X58W	29	3.937	6.500	1.600	100	DALSU1	0EM07	0EM09	Q0581	Q0582
HI326P	2X58W	65	10.773	6.500	1.600	100	DALSU1	0EM07	0EM09	Q0581	Q0582

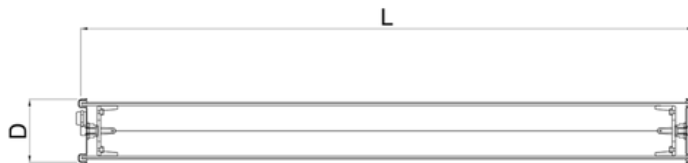

OPTIONAL ACCESSORIES / ACCESORIOS OPCIONALES

DESCRIPTION	Ref.	
Zinc plated steel clamps - Bridas acero cincado (1)	Q0338	2 pcs
Stainless steel clamps - Bridas acero inoxidable (1)	Q0347	2 pcs
Quick opening stainless steel clamps - Bridas acero inoxidable de apertura rápida (2)	Q0348	2 pcs
Anti vandalic PC clamp - Bridas PC anti vandálicas (3)	Q0110	2 pcs
Stainless steel 316 end caps - Tapas acero inox 316	Q0657	2 pcs
Steel cable suspension - Suspensión cable de acero	Q0349	1900mm 2 pcs
Armored cable gland - Prensaestopas cable armado	EX508	Cable 9-16mm
Emergency - Emergencia 1h	See chart (Emerg. sup 1h)	↑
Emergency - Emergencia 3h	See chart (Emerg. sup 3h)	↑
Dali option - Opción DALI	See chart (DALI sup.)	↑
Pole fixing - Fijación a báculo	Q0978	ø 60 mm
3 poles continuous line wiring - Línea continua 3 polos	See chart (Cont. lin 3p)	↑
5 poles continuous line wiring - Línea continua 5 polos	See chart (Cont. lin 5p)	↑