

# I-PYROS LED









+ **Brida**  
Clamp  
Collier




+ **Tapón Ex db**  
Plug Ex db  
Bouchon Ex db



+ **Prensaestopa Ex db**  
Cablegland Ex db  
Presse-étoupe Ex db




## APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES




Disponible sistema inteligente inalámbrico Atenea.  
Available ATENEA Intelligent Wireless System.



IT - DE

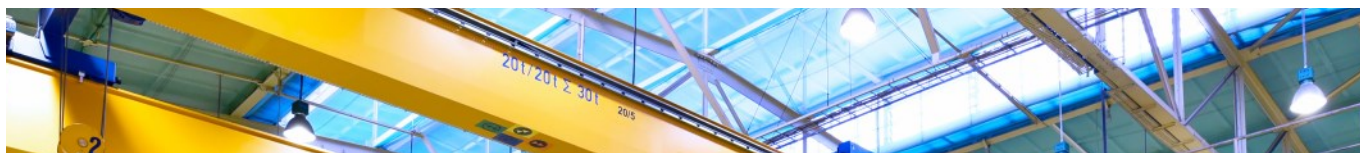

|            |                       |                   |                 |                                     |                            |           |   |
|------------|-----------------------|-------------------|-----------------|-------------------------------------|----------------------------|-----------|---|
| <b>RG1</b> | MACADAM<br><b>3/4</b> | <b>UGR</b><br><19 | <b>CR&gt;80</b> | <b>L70B50</b><br>><br><b>50.000</b> | <b>IP66</b><br><b>IK10</b> | <b>CE</b> | 2014/34/EU<br><b>Ex</b><br>II2GD<br>Ex db IIB+H2 T6 Gb<br>Ex tb IIIC T85°Db |
|------------|-----------------------|-------------------|-----------------|-------------------------------------|----------------------------|-----------|---|

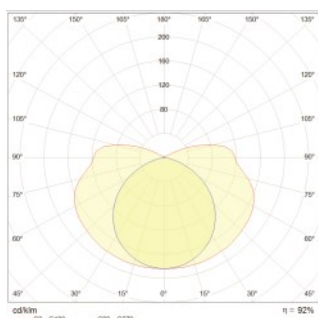


| Ref.  | Tamaño<br>Size<br>Dimension | Potencia<br>Power<br>Puissance | Emisión bruta<br>Gross output<br>Flux de la source | Tª color<br>Tª colour<br>Tª couleur | L     | D    | D + brida<br>D + clamp<br>D + fixations | Embalaje<br>Packaging<br>Emballage |
|-------|-----------------------------|--------------------------------|--|-------------------------------------|-------|------|---|------------------------------------|
|       | (mm)                        | (W)                            | (Lm)   | (°K)                                | (mm)  | (mm) | (mm)                                    |                                    |
| PY113 | 600                         | 12                             | 2.281  | 4.000                               | 748   | 150  | 208                                     | 1                                  |
| PY123 | 600                         | 24                             | 4.561  | 4.000                               | 748   | 150  | 208                                     | 1                                  |
| PY213 | 1.200                       | 24                             | 4.561  | 4.000                               | 1.357 | 150  | 208                                     | 1                                  |
| PY223 | 1.200                       | 48                             | 9122   | 4.000                               | 1.357 | 150  | 208                                     | 1                                  |
| PY313 | 1.500                       | 30                             | 5.701  | 4.000                               | 1.659 | 150  | 208                                     | 1                                  |
| PY323 | 1.500                       | 60                             | 11.403   | 4.000                               | 1.659 | 150  | 208                                     | 1                                  |

## ACCESORIOS PYROS LED / PYROS LED ACCESORIES / ACCESSOIRES PYROS LED



### PRENSAESTOPA CABLE ARMADO / ARMED CABLEGLAND EEX / PRESSE-ÉTOUPE ARMÉ EEX

| Ref.  | Tamaño de rosca (R)<br>Thread size<br>Taille du filet (R) |       |         | Gas cónica<br>Gas conic<br>Gaz conique | Dimensiones<br>Dimensions<br>Dimensions |    |    |    | Ø Exterior<br>Ø Overall<br>Ø Extérieur |      |                      |
|-------|---|-------|---------|--|---|----|----|----|--|------|----------------------|
|       | Métrica<br>Metrics<br>Métrique                            | PG.   | NPT     |  | A                                       | B  | C  | D  | Min.                                   | Max. | Tipo<br>Type<br>Type |
| EX507 | M25x1,5   | 16 21 | 3/4" 1" | 3/4" 1"                                | 35                                      | 39 | 42 | 15 | 12                                     | 14   | a                    |

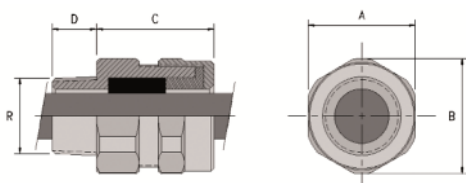

**Ex** II 2 GD Ex db IIC T6

**1-10**  
**DALI**

**EMERGENCY**  
**1h/3h**


IECEx Certificate Number:  
IECEx INE 21.0025X



|            |                       |                   |                 |                                     |                            |           |   |
|------------|-----------------------|-------------------|-----------------|-------------------------------------|----------------------------|-----------|---|
| <b>RG1</b> | MACADAM<br><b>3/4</b> | <b>UGR</b><br><19 | <b>CR&gt;80</b> | <b>L70B50</b><br>><br><b>50.000</b> | <b>IP66</b><br><b>IK10</b> | <b>CE</b> | 2014/34/EU<br><b>Ex</b><br>II2GD<br>Ex db IIB+H2 T6 Gb<br>Ex tb IIIC T85°Db |
|------------|-----------------------|-------------------|-----------------|-------------------------------------|----------------------------|-----------|---|



VERSION OPAL / OPAL VERSION / VERSION OPALE

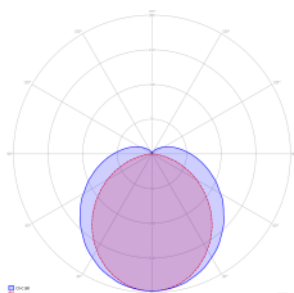


| Ref.   | Tamaño<br>Size<br>Dimension<br>(mm) | Potencia<br>Power<br>Puissance<br>(W) | Emisión bruta<br>Gross output<br>Flux de la source<br>(Lm) | Emisión neta<br>Nettoutput<br>Émission nette<br>(Lm) | Tª color<br>Tª colour<br>Tª couleur<br>(°K) | L<br>(mm) | D<br>(mm) | D + brida<br>D + clamp<br>D + fixations<br>(mm) | Embalaje<br>Packaging<br>Emballage<br>1 |
|--------|-------------------------------------|---------------------------------------|--|--|---|-----------|-----------|---|---|
| PY1130 | 600                                 | 12                                    | 2.281  | 1756   | 4.000                                       | 748       | 150       | 208   | 1                                       |
| PY1230 | 600                                 | 24                                    | 4.561  | 3512   | 4.000                                       | 748       | 150       | 208   | 1                                       |
| PY2130 | 1.200                               | 24                                    | 4.561  | 3512   | 4.000                                       | 1.357     | 150       | 208   | 1                                       |
| PY2230 | 1.200                               | 48                                    | 9122   | 7024   | 4.000                                       | 1.357     | 150       | 208   | 1                                       |
| PY3130 | 1.500                               | 30                                    | 5.701  | 4390   | 4.000                                       | 1.659     | 150       | 208   | 1                                       |
| PY3230 | 1.500                               | 60                                    | 11.403   | 8780   | 4.000                                       | 1.659     | 150       | 208   | 1                                       |

ACCESORIOS PYROS LED / PYROS LED ACCESORIES / ACCESSOIRES PYROS LED



PRENSAESTOPA CABLE ARMADO / ARMED CABLEGLAND EEX / PRESSE-ÉTOUPE ARMÉ EEX

| Ref.  | Tamaño de rosca (R)<br>Thread size<br>Taille du filet (R) |       |         | Gas cónica<br>Gas conic<br>Gaz<br>conique | Dimensiones<br>Dimensions<br>Dimensions |    |    |    | Ø Exterior<br>Ø Overall<br>Ø Extérieur |      |                      |
|-------|---|-------|---------|---|---|----|----|----|--|------|----------------------|
|       | Métrica<br>Metrics<br>Métrique                            | PG.   | NPT     |   | A                                       | B  | C  | D  | Min.                                   | Max. | Tipo<br>Type<br>Type |
| EX507 | M25x1,5   | 16 21 | 3/4" 1" | 3/4" 1"                                   | 35                                      | 39 | 42 | 15 | 12                                     | 14   | a                    |

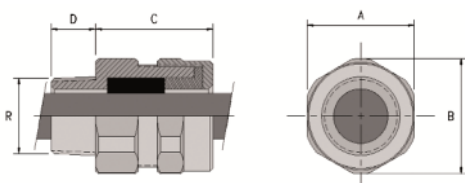

**Ex** II 2 GD Ex db IIC T6

**1-10**  
**DALI**

**EMERGENCY**  
**1h/3h**

IECEx Certificate Number:  
IECEx INE 21.0025X