

# I-PYROS LED









+ **Brida**  
Clamp  
Collier




+ **Tapón Ex db**  
Plug Ex db  
Bouchon Ex db



+ **Prensaestopa Ex db**  
Cablegland Ex db  
Presse-étoupe Ex db



## APLICACIONES INDICADAS SUITABLE APPLICATIONS APPLICATIONS APPROPRIÉES




Tapas aluminio anodizado resistentes a corrosión y ambientes marinos.

End caps manufactured in anodized aluminum, for marine environments and corrosion resistant.


Embouts en aluminium anodisé résistant à la corrosion et adapté aux environnements marins.



IT - DE

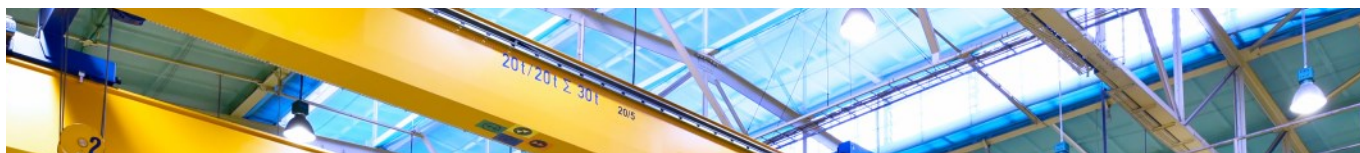

<b>RG1</b>	MACADAM <b>3/4</b>	<b>UGR</b> ⊙	<b>CR&gt;80</b>	<b>L80B50</b> > <b>72.000</b>	<b>IP66</b> <b>IK10</b>	<b>CE</b>	2014/34/EU <b>Ex</b> II 2GD Ex db IIB+HT6Gb Ex tb IIIC T8Db
------------	-----------------------	-----------------	-----------------	-------------------------------------	----------------------------	-----------	---



Ref.	Tamaño Size Dimension (mm)	Potencia Power Puissance (W)	Emisión bruta Gross output Flux de la source (Lm)	Tª color Tª colour Tª couleur (°K)	L (mm)	D (mm)	D + brida D + clamp D + fixations (mm)	Embalaje Packaging Emballage 1
PY113	600	12	2.281	4.000	748	150	208	1
PY123	600	24	4.561	4.000	748	150	208	1
PY213	1.200	24	4.561	4.000	1.357	150	208	1
PY223	1.200	48	9122	4.000	1.357	150	208	1
PY313	1.500	30	5.701	4.000	1.659	150	208	1
PY323	1.500	60	11.403	4.000	1.659	150	208	1


## ACCESORIOS PYROS LED / PYROS LED ACCESORIES / ACCESSOIRES PYROS LED



### PRENSAESTOPA CABLE ARMADO / ARMED CABLEGLAND EEX / PRESSE-ÉTOUPE ARMÉ EEX

Ref.	Tamaño de rosca (R) Thread size Taille du filet (R)			Gas cónica Gas conic Gaz conique	Dimensiones Dimensions Dimensions				Ø Exterior Ø Overall Ø Extérieur		
	Métrica Metrics Métrique	PG.	NPT		A	B	C	D	Min.	Max.	Tipo Type Tipo
EX507	M25x1,5	16 21	3/4" 1"	3/4" 1"	35	39	42	15	12	14	a

Disponible sistema inteligente inalámbrico Atenea.  
Available ATENEA Intelligent Wireless System.

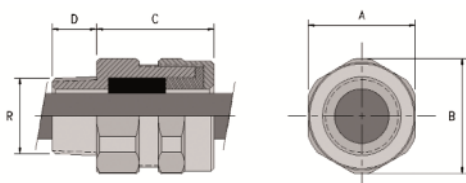


**Ex** II 2GD Ex db IIC T6

IECEx Certificate Number:  
IECEx INE 21002X

**DALI**


**EMERGENCY**  
1h/3h

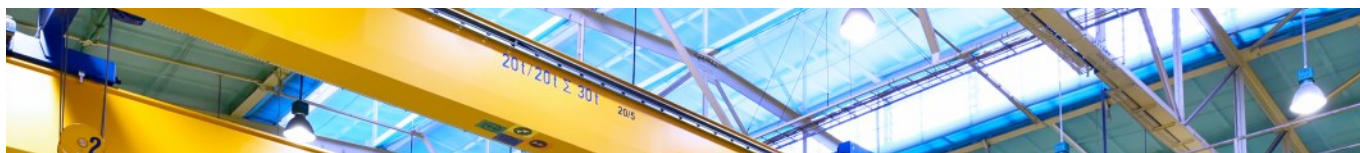

<b>RG1</b>	MACADAM <b>3/4</b>	<b>UGR</b> < 19	 <b>CR &gt; 80</b>	<b>L80B50</b> > <b>72.000</b>	<b>IP66</b> <b>IK10</b>	<b>CE</b>	2014/34/EU  II 2GD Ex db IIB+II T6Gb Ex tb IIIC T8Db
------------	-----------------------	--------------------	-----------------------	-------------------------------------	----------------------------	-----------	--




VERSION OPAL OPAL VERSION VERSION OPALE



Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión neta Nettoutput Émission nette	Tª color Tª colour Tª couleur	L	D	D + brida D + clamp D + fixations	Embalaje Packaging Emballage
	(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
PY1130	600	12	2.281	1756	4.000	748	150	208	1
PY1230	600	24	4.561	3512	4.000	748	150	208	1
PY2130	1.200	24	4.561	3512	4.000	1.357	150	208	1
PY2230	1.200	48	9122	7024	4.000	1.357	150	208	1
PY3130	1.500	30	5.701	4390	4.000	1.659	150	208	1
PY3230	1.500	60	11.403	8780	4.000	1.659	150	208	1

## ACCESORIOS PYROS LED / PYROS LED ACCESORIES / ACCESSOIRES PYROS LED

### FIJACIÓN A BÁCULO / POLE FIXING / POSTE DE FIXATION

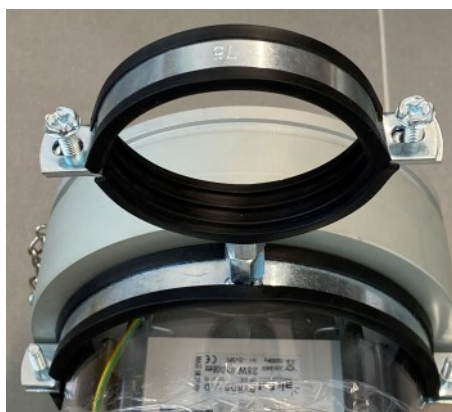

Anclaje a poste o báculo mediante doble brida de diámetro según necesidad del cliente.

Pole fixing with double clamp, following customer diameter requirements.

Ancrage au poteau ou au bâton au moyen d'une double bride dont le diamètre dépend des besoins du client.