



MAXUNO LITE




LED



AI

GRADO MARINO



STEEL



ATEX

M16






ZONE
1-21
"db"

APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES



Temperatura ambiente de trabajo:
Working ambient temperature:
Température de l'environnement de travail
Ta = -20- +60°C

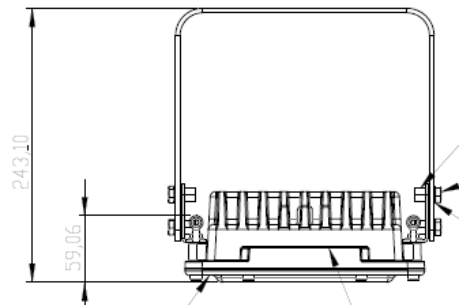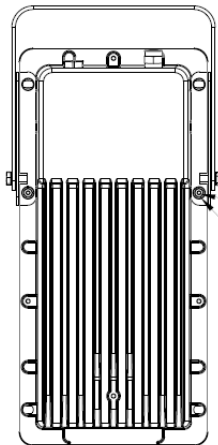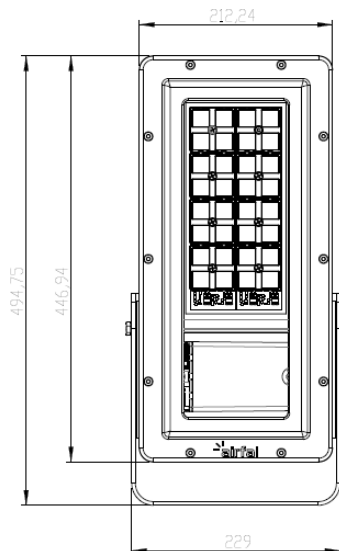

IP66

IK10




2014/34/EU



 II 2GD
 Ex db IIB T6 Gb
 Ex tb IIIC 85°C Db


Ref.	NºMódulos Modules NºModules	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión neta Nettoutput Flux du projecteur	Tª color Tª colour Tª couleur	Tamaño Size Dimension	Alto Wide Large	Peso Weight Poids
		(W)	(lm)	(lm)	(°K)	(mm)	(mm)	(Kgrs)
PA503	2	50	7193	6591	5000	229x447	243	17
PA504	2	60	8512	7800	5000	229x447	243	24.5
PA505	2	65	10153	9303	5000	229x447	243	32


Ópticas disponibles / Available optics / Optique disponible



Ref. +A
Extensivo 100° / Extensive 100° / Extensif



Ref. +B
Asimétrico / Asymmetric / Asymétrique



Ref. +C
Intensivo 65° / Intensive 65° / Intensif 65°

Esta luminaria puede utilizarse como proyector o como campana industrial /

This luminaire can be use as a projector and as a high bay /

Ce luminaire est approprié pour son installation comme projecteur et comme high bay industriel

Prensaestopas cable armado M16
 M16 Armored Cable Gland II 2 GD Ex db IIC T6
 M16 Presse-étoupe pour câble armé

Tornillería y accesorios fijación de acero A4 / 316.

Screws and fixing accesories in A4/316 Steel.

Vis et accessoires de fixation en acier A4/316.

DALI OPTION

