



# FARM LED




+ **Brida**  
Clamp  
Collier




ANTIVANDÁLICA / ANTIVANDALISM / ANTIVANDALISME




APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

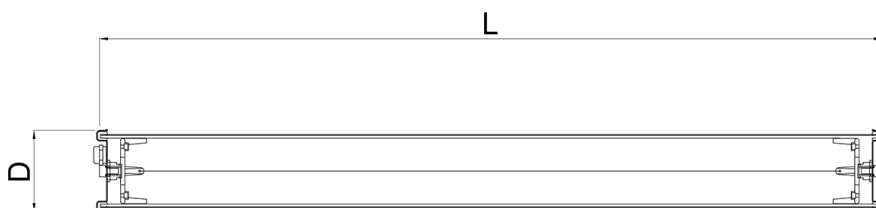

LUMINARIAS ESTANCAS / WATERPROOF LUMINAIRES / LUMINAIRES ETANCHES

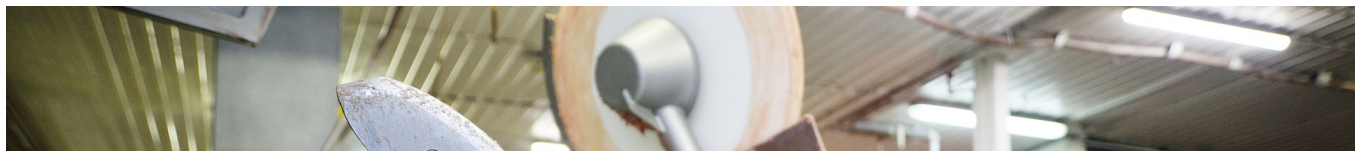

RG 0/1	MACADAM 3/4	UGR <19	CR>80	L70B50 > 50.000	IK10	IP69K	CE	EN 60598-1
--------	----------------	------------	-------	-----------------------	------	-------	----	------------



Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión Neta Net output Flux sortant	Tª color Tª colour Tª couleur	L	D	D + brida D + clamp D + fixations	Embalaje Packaging Emballage
	(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
Q0795	600	13	1.490	1.155	3.000	763	100	120	1
Q0899	600	13	1.550	1.201	4.000	763	100	120	1
Q0900	600	16	2.560	1.984	3.000	763	100	120	1
Q0955	600	16	2.670	2.070	4.000	763	100	120	1
Q0796	1200	24	2.980	2.310	3.000	1.375	100	120	1
Q0957	1200	24	3.200	2.480	4.000	1.375	100	120	1
Q0958	1200	32	5.120	3.969	3.000	1.375	100	120	1
Q0959	1200	32	5.340	4.139	4.000	1.375	100	120	1
Q0797	1500	29	3.720	2.883	3.000	1.660	100	120	1
Q0961	1500	29	4.000	3.100	4.000	1.660	100	120	1
Q0962	1500	40	6.310	4.891	3.000	1.660	100	120	1
Q0963	1500	40	6.700	5.193	4.000	1.660	100	120	1

## ACCESORIOS FARM / FARM ACCESSORIES / ACCESSOIRES FARM



Ref. **Q0349**  
**Suspensión con cable de acero**  
Steel cable suspension  
Suspension avec câble en acier



Ref. **Q0401**  
**Bridas de acero inoxidable**  
Stainless steel clamps  
Colliers inox antivandalisme



Ref. **Q0159**  
**Bridas de acero cincado**  
Zinc-plated steel clamps  
Colliers en acier galvanisé



Ref. **Q0158**  
**Brida de metacrilato**  
Antivandalic acrylic  
Colliers en méthacrylate



Ref. **Q0657**  
**Tapa acero INOX 316**  
Stainless Steel 316 end caps  
Embouts INOX 316

**LÍNEA CONTINUA**  
CONTINUOUS LINE CONNECTION  
CÂBLAGE TRAVERSANT

**3 polos / 3 poles / 3 pôles** Ref. **Q0570**  
**5 polos / 5 poles / 5 pôles** Ref. **Q0571**

DALI

EMERGENCY  
1h/3h

Ref. **Q0978**  
**Sujeción a báculo**  
Pole adapter  
Adaptateur de lampadaire






RG 0/1	MACADAM 3/4	UGR <19	CR>80	L70B50 > 72.000	IK10	IP69K	CE EN 60598-1
--------	----------------	------------	-------	-----------------------	------	-------	------------------



**VERSIÓN ESPECIAL ALTAS TEMPERATURAS (Hasta 80°C Ta).**  
**SPECIAL HIGH TEMPERATURES VERSION (Up to Ta 80°C).**  
**VERSION SPÉCIALE POUR HAUTES TEMPÉRATURES (jusqu'à 80°C)**



Ref.	Tamaño Fuente Luz Light Source Size Dimension (mm)	Potencia Power Puissance (W)	Emisión bruta Gross output Flux de la source (Lm)	Emisión Neta Net output Flux sortant (Lm)	Tª color Tª colour Tª couleur (°K)	L (mm)	D (mm)	D + brida D + clamp D + fixations (mm)	Embalaje Packaging Emballage
Q0955K	560	17	2.224	1650	5.000	763	100	120	1
Q0959K	1120	34	4448	3300	5.000	1.375	100	120	1
Q0963K	1400	43	5560	4125	5.000	1.660	100	120	1

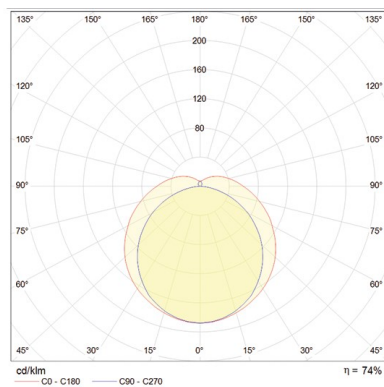

TUBO DIFUSOR EN PMMA ESPECIAL CON CERTIFICACIÓN FDA PARA INDUSTRIA ALIMENTARIA.  
 DIFFUSER MADE IN FDA CERTIFIED PMMA SPECIAL FOR FOOD INDUSTRY.  
 TUBE DIFFUSEUR EN PMMA SPÉCIAL AVEC CERTIFICATION FDA POUR L'INDUSTRIE ALIMENTAIRE.

