








EXCALIBUR




+ **Brida**
Clamp
Collier



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

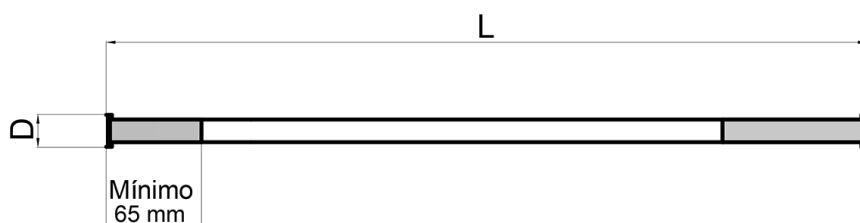

IT - DE

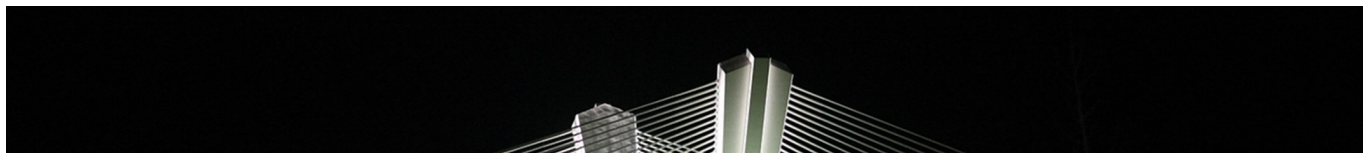

RG 0/1

MACADAM

3/4

UGR
<19

CR>80


L70B50
>
50.000

IK07

IP67

CE

EN 60598-1



Ref.	Potencia Power Puissance (W)	Emisión Light emission Intensité lum. (Lm)	Emisión Neta Net output Flux sortant (Lm)	Tª color Tª colour Tª couleur (°K)	L (mm)	D (mm)	Embalaje Packaging Emballage
ER113	13	1.590	906	3.000	980	41	1
ER114	13	1.658	1.010	4.000	980	41	1
ER123	16	2.670	1.623	3.000	980	41	1
ER124	16	2.859	1.740	4.000	980	41	1
ER213	24	2.980	1.812	3.000	1.620	41	1
ER214	24	3.200	1.946	4.000	1.620	41	1
ER223	32	5.120	3.113	3.000	1.620	41	1
ER224	32	5.340	3.247	4.000	1.620	41	1
ER313	29	3.720	2.262	3.000	1.910	41	1
ER314	29	4.000	2.432	4.000	1.910	41	1
ER323	40	6.310	3.836	3.000	1.910	41	1
ER324	40	6.700	4.074	4.000	1.910	41	1

ACCESORIOS EXCALIBUR / EXCALIBUR ACCESORIES / ACCESSOIRES EXCALIBUR



Ref.

R0057

Bridas de acero inoxidable
Stainless steel clamps
Colliers inox antivandalisme



R0063

Tapas metálicas y racor metálico
Metallic end caps and nickel-plated gland
Embouts métalliques et presseétoupe



Q0849

Suspensión con cable de acero
Steel cable suspension
Suspension avec câble en acier

LÍNEA CONTINUA
CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles

Ref. Q0882

5 polos / 5 poles / 5 pôles

Ref. Q0580

Ref.

Q0978

Sujeción a báculo
Pole adapter
Adaptateur de lampadaire



DALI

EMERGENCY
1h/3h