



MUSTANG



LED




PC




RAB/BAR/RAB



SS 304



960°C




PG-11

APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES



Temperatura ambiente: -20 a +40°C.
Ambient working temperature: -20 a +40°C.
Température de travail : -20 a +40°C.

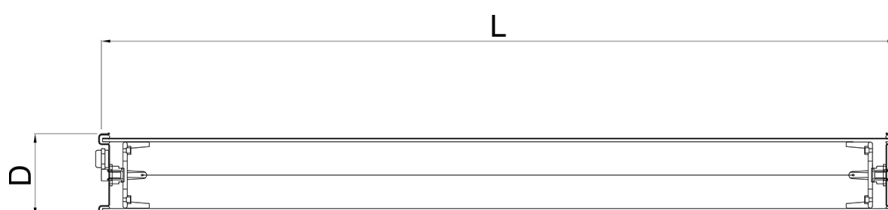


IT - DE




RG 0	MACADAM 3/4	UGR <19	CR>80	L80B50 > 70.000	IK10	IP69K	CE	EN 60598-1
------	----------------	------------	-------	-----------------------	------	-------	----	------------



Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión Neta Net output Flux sor- tant	Tª color Tª colour Tª couleur	L	D	D + brida D + clamp D + fixations	Embalaje Packaging Emballage
	(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
MU113	600	13	1.490	997	3.000	763	100	120	1
MU114	600	13	1.550	1.037	4.000	763	100	120	1
MU123	600	18	2.427	1.626	3.000	763	100	120	1
MU124	600	18	2.558	1.714	4.000	763	100	120	1
MU213	1200	24	2.980	1.993	3.000	1.375	100	120	1
MU214	1200	24	3.200	2.140	4.000	1.375	100	120	1
MU223	1200	36	4.854	3.252	3.000	1.375	100	120	1
MU224	1200	36	5.116	3.428	4.000	1.375	100	120	1
MU313	1500	29	3.720	2.488	3.000	1.660	100	120	1
MU314	1500	29	4.000	2.675	4.000	1.660	100	120	1
MU323	1500	45	6.067	4.065	3.000	1.660	100	120	1
MU324	1500	45	6.395	4285	4.000	1.660	100	120	1

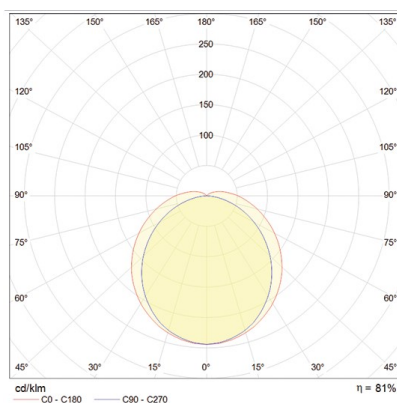








RG 0	MACADAM 3/4	UGR <19	 CR>80	L80B50 > 70.000	IK10	IP69K	CE EN 60598-1
------	----------------	------------	--	-----------------------	------	-------	----------------------



ACCESORIOS MUSTANG / MUSTANG ACCESORIES / ACCESSOIRES MUSTANG

				
Ref. Q0349	Q0401	Q0159	Q0158	Q0657
Suspensión con cable de acero Steel cable suspension Suspension avec câble en acier	Bridas de acero inoxidable Stainless steel clamps Colliers inox antivandalisme	Bridas de acero cincado Zinc-plated steel clamps Colliers en acier galvanisé	Brida de metacrilato Antivandalic acrylic Colliers en méthacrylate	Tapa acero INOX 316 Stainless Steel 316 end caps Embouts INOX 316

		
Ref. Q0106	Q0982	Q0889
Bridas rápidaS acero inox. 304 Stainless steel clamps Colliers inox antivandalisme	Conector rápido 3 polos 3 poles fast connector connecteur rapide 3 pôles	Conector rápido 5 polos 5 poles fast connector connecteur rapide 5 pôles

LÍNEA CONTINUA CONTINUOUS LINE CONNECTION CÂBLAGE TRAVERSANT	3 polos / 3 poles / 3 pôles	Ref. Q0570
	5 polos / 5 poles / 5 pôles	Ref. Q0571

DALI	EMERGENCY 1h/3h
-------------	---------------------------

Ref. Q0978	
Sujeción a báculo Pole adapter Adaptateur de lampadaire	