



1.17

ORION




LED




PC




RAB/BAR/RAB



ABS





PG-11
NYLON




850°C

APLICACIONES INDICADAS / SUITABLE APPLICATIONS / *APPLICATIONS APPROPRIÉES*



Temperatura ambiente: -20 a +40°C.
Ambient working temperature: -20 a +40°C.
Température de travail : -20 a +40°C.

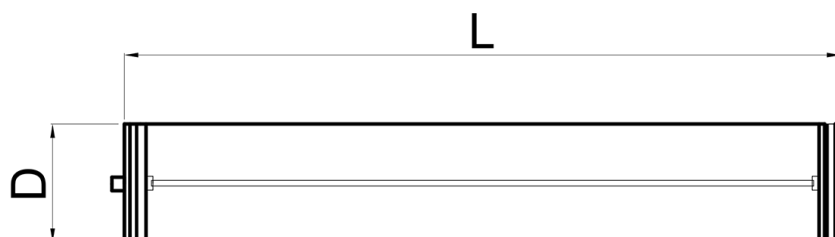



RG 1

MACADAM



UGR
<19

CR>80


L80B50
>
70.000

IK09

IP67

CE

EN 60598-1

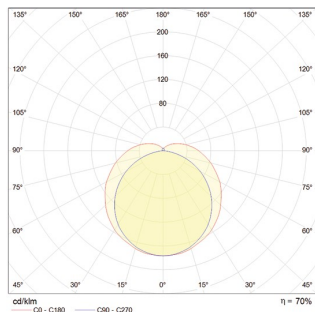

Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión Neta Net output Flux sor- tant	Tª color Tª colour Tª couleur	L	D	D + brida D + clamp D + fixations	Embalaje Packaging Emballage
	(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
OR113	600	13	1.490	1.040	3.000	770	81	113	1
OR114	600	13	1.550	1.082	4.000	770	81	113	1
OR123	600	18	2.427	1.700	3.000	770	81	113	1
OR124	600	18	2.558	1.791	4.000	770	81	113	1
OR213	1200	24	2.980	2.080	3.000	1.380	81	113	1
OR214	1200	24	3.200	2.234	4.000	1.380	81	113	1
OR223	1200	36	4.854	3.348	3.000	1.380	81	113	1
OR224	1200	36	5.116	3.581	4.000	1.380	81	113	1
OR313	1500	29	3.720	2.597	3.000	1.633	81	113	1
OR314	1500	29	4.000	2.792	4.000	1.633	81	113	1
OR323	1500	45	6.067	4.247	3.000	1.633	81	113	1
OR324	1500	45	6.395	4.477	4.000	1.633	81	113	1


1.17

ORION

BAJAS TEMPERATURAS
LOW TEMPERATURES
BASSES TEMPÉRATURES



Brida
Clamp
Collier

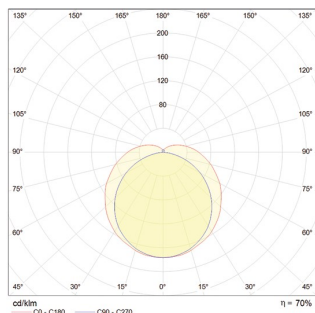

Ref.	Tamaño Size <i>Dimension</i>	Potencia Power <i>Puissance</i>	Emisión bruta Gross output <i>Flux de la source</i>	Emisión Neta Net output <i>Flux sortant</i>	Tª color Tª colour <i>Tª couleur</i>	Largo Length <i>Longueur</i>	Ancho Wide <i>Large</i>	Ancho con brida Width with clamp <i>Largeur avec fixations</i>	Embalaje Packaging <i>Emballage</i>
	(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
OC123	600	32	4.300	3.000	3.000	770	81	113	1
OC124	600	32	4.600	3.200	4.000	770	81	113	1
OC223	1200	64	8.600	6.000	3.000	1.380	81	113	1
OC224	1200	64	9.000	6.300	4.000	1.380	81	113	1
OC323	1500	80	10.750	7.500	3.000	1.633	81	113	1
OC324	1500	80	11.400	8.000	4.000	1.633	81	113	1

ACCESORIOS ORION / ORION ACCESSORIES / ACCESSOIRES ORION



Ref. **Q0349**
Suspensión con cable de acero
Steel cable suspension
Suspension avec câble en acier



Ref. **Q0347**
Bridas de acero inoxidable
Stainless steel clamps
Colliers inox antivandalisme



Ref. **Q0338**
Bridas de acero cincado
Zinc-plated steel clamps
Colliers en acier galvanisé



Ref. **Q0102**
Brida policarbonato antivandálica
Antivandalic PC clamp
Colliers en polycarbonate



Ref. **Q0348**
Bridas rápidaS acero inox. 304
Stainless steel clamps
Colliers inox antivandalisme



Ref. **Q0339**
Tapas metálicas y racor metálico
Metallc end caps and nickel-plated gland
Embouts métalliques et presseétoupe



Ref. **Q0147**
Pieza anticavitación
Anticavitation piece
Kit anti-cavitation



Ref. **Q0161**
Válvula anticondensación
Anti condensation valve
Valve anti-condensation



Ref. **Q0978**
Sujeción a báculo
Pole adapter
Adaptateur de lampadaire



Ref. **Q0983**
Conector rápido 3 polos



Ref. **Q0888**
Conector rápido 5 polos

LÍNEA CONTINUA
CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles

Ref. **Q0578**

5 polos / 5 poles / 5 pôles

Ref. **Q0579**

DALI

EMERGENCY
1h/3h