






1.9

THUNDER




PG-11

APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES



Temperatura ambiente: -20 a +40°C.
Ambient working temperature: -20 a +40°C.
Température de travail : -20 a +40°C.

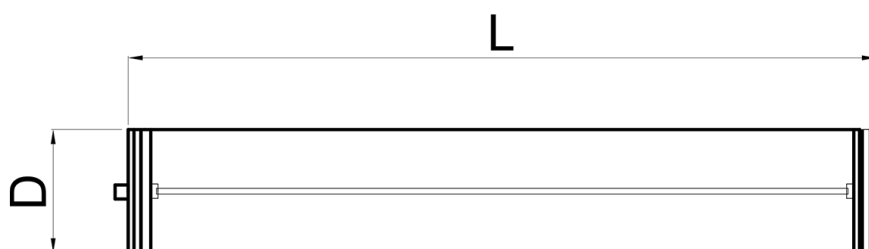

RG 1

UGR
<19

CR>80


L80B50
>
70.000

IK10

IP68-2



EN 60598-1



Ref.	Tamaño Size <i>Dimension</i>	Potencia Power <i>Puissance</i>	Emisión bruta Gross output <i>Flux de la source</i>	Emisión Neta Net output <i>Flux sor- tant</i>	Tª color Tª colour <i>Tª couleur</i>	L	D	D + brida D + clamp <i>D + fixations</i>	Embalaje Packaging <i>Emballage</i>
	(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
TH113	600	13	1.490	955	3.000	709	83	113	1
TH114	600	13	1.550	994	4.000	709	83	113	1
TH123	600	18	2.427	1.556	3.000	709	83	113	1
TH124	600	18	2.598	1.665	4.000	709	83	113	1
TH213	1200	24	2.980	1.910	3.000	1.319	83	113	1
TH214	1200	24	3.200	2.051	4.000	1.319	83	113	1
TH223	1200	36	4.854	3.112	3.000	1.319	83	113	1
TH224	1200	36	5.116	3.279	4.000	1.319	83	113	1
TH313	1500	29	3.720	2.385	3.000	1.574	83	113	1
TH314	1500	29	4.000	2.564	4.000	1.574	83	113	1
TH323	1500	45	6.067	3.889	3.000	1.574	83	113	1
TH324	1500	45	6.395	4.100	4.000	1.574	83	113	1

RG 1

UGR
<19

CR>80

L80B50
>
70.000

IK10

IP68-2

CE

EN 60598-1



ACCESORIOS THUNDER / THUNDER ACCESSORIES / ACCESSOIRES THUNDER



Ref. Q0349

Suspensión con cable de acero
Steel cable suspension
Suspension avec câble en acier



Q0655

Bridas de acero inoxidable
Stainless steel clamps
Colliers inox antivandalisme



Q0109

Bridas de acero inoxidable de apertura rápida
Quick opening stainless Steel clamps
Colliers inox de ouverture rapide à grenouillère



Q0159

Bridas de acero cincado
Zinc-plated steel clamps
Colliers en acier galvanisé



Q0147

Pieza anticavitación
Anticavitation piece
Kit anti-cavitation



Ref. Q0153

Brida policarbonato anti vandálica
Anti-vandalic PC clamp
Colliers en polycarbonate



Q0984

Conector rápido 3 polos
3 poles fast connector
Connecteur rapide 3 pôles



Q0985

Conector rápido 5 polos
5 poles fast connector
Connecteur rapide 5 pôles



Q0160

Válvula anticondensación
Anti condensation valve
Valve anti condensation



Q0978

Sujeción a báculo
Pole adapter
Adaptateur de lampadaire

LÍNEA CONTINUA
CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles

Ref. Q0574

5 polos / 5 poles / 5 pôles

Ref. Q0575

DALI

 EMERGENCY
1h/3h