









PISTON ECO



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

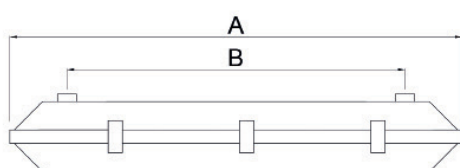

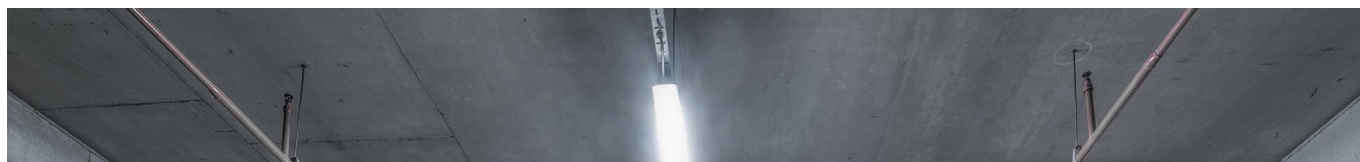

RG 1

MACADAM

3/4

UGR
<19

CR>80

L70B50
>
50.000

IP66/65


IK08

CE

EN 60598-1



1 MÓDULO LED / 1 LED MODULES / 1 MODULES LED



Ref.	Tamaño Size Dimension	Potencia Watts Puissance	Emisión Light emission Intensité lum.	Emisión neta Net output Flux sortant	Tª color Tª colour Tª couleur	A	B	C	D	Cierre Fasteners Fermetures	Embalaje Packaging Emballage
		(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	(mm)		
PC113	600	11	1570	1272	3000	664	260	100	110	6	1
PC114	600	11	1670	1320	4000	664	260	100	110	6	1
PC123	600	18	2670	2163	3000	664	260	100	110	6	1
PC124	600	18	2777	2249	4000	664	260	100	110	6	1
PC213	1200	22	3140	2543	3000	1274	870	100	110	8	1
PC214	1200	22	3272	2650	4000	1274	870	100	110	8	1
PC223	1200	36	5337	4323	3000	1274	870	100	110	8	1
PC224	1200	36	5555	4500	4000	1274	870	100	110	8	1
PC313	1500	28	3928	3221	3000	1575	650	100	110	12	1
PC314	1500	28	4260	3450	4000	1575	650	100	110	12	1
PC323	1500	45	6671	5470	3000	1575	650	100	110	12	1
PC324	1500	45	6944	5694	4000	1575	650	100	110	12	1

ACCESORIOS PISTON / PISTON ACCESSORIES / ACCESSOIRES PISTON



Ref. S2150

Grapa de acero inoxidable
Stainless steel clip
Clip acier inox



S2151

Sujeción a carril
Rail fastening
Platine de fixation sur rail



Q0943

Conector 3 polos
3 poles connector
3 pôles connecteur



Q0944

Conector 3 polos
3 poles connector
3 pôles connecteur

LÍNEA CONTINUA
CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles

Ref. Q0883

5 polos / 5 poles / 5 pôles

Ref. Q0887

DALI

EMERGENCY
1h / 3h