







OVEN



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES



+200 °C

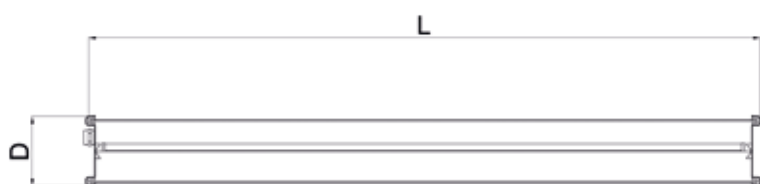




IP68-2

IK07

CE

EN 60598-1

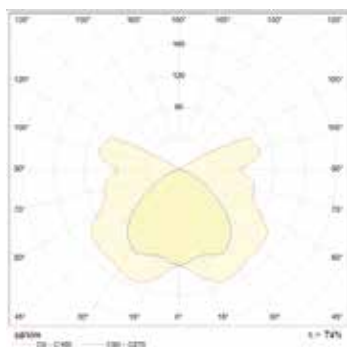

Ref.	Potencia Watts Puissance	L	D	D + brida D + clamp D + fixations	Embalaje Packaging Emballage
	(W)	(mm)	(mm)	(mm)	
Q0949	1x40	275	105	140	1
Q0950	2x40	275	105	140	1



Q0116
 Brida acero inoxidable.
 Stainless steel clamps.
 Colliers en acier inoxydable.

