

IP67

IK 09

## TECHNICAL DATA / DATOS TÉCNICOS

### AMBIENT CONDITIONS / CONDICIONES AMBIENTALES

|                                            |               |
|--------------------------------------------|---------------|
| Ambient temperature - Temperatura ambiente | 0°C ... +40°C |
|--------------------------------------------|---------------|

### LIGHTING DATA / DATOS LUMÍNICOS


|                                           |        |
|-------------------------------------------|--------|
| Colour temperature - Temperatura de color | 5.500K |
|-------------------------------------------|--------|

### MATERIAL REQUIRED FOR INSTALLATION / MATERIAL REQUERIDO PARA LA INSTALACIÓN

|                             |       |                               |
|-----------------------------|-------|-------------------------------|
| Cable gland - Prensaestopas | PG-11 | Included                      |
| Clamps - Bidas              |       | Optional - see Accessories p. |

### MECHANICAL DATA / DATOS CONSTRUCTIVOS

|             |         |
|-------------|---------|
| Tube - Tubo | B-Color |
|-------------|---------|


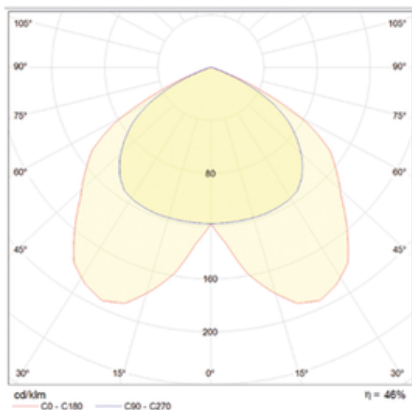


| Ref.  | (Lm) | Batt. | Maintained/ N | L (mm) | D (mm) |
|-------|------|-------|---------------|--------|--------|
| Q0305 | 200  | 1H    | ●             | 415    | 81     |
| Q0306 | 200  | 1H    | ●             | 415    | 81     |
| Q0307 | 300  | 1H    | ●             | 415    | 81     |
| Q0308 | 300  | 1H    | ●             | 415    | 81     |
| Q0316 | 200  | 1H    | ●             | 415    | 81     |
| Q0317 | 300  | 1H    | ●             | 415    | 81     |

MAINTAINED  
PERMANENTE ●

NON-MAINTAINED  
NO PERMANENTE ●

PERMANENT MODE SWITCHED  
MODO PERMANENTE ON/OFF ●

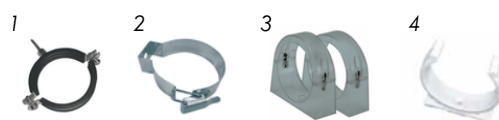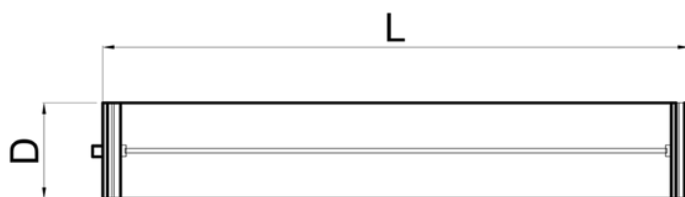

## OPTIONAL ACCESSORIES / ACCESORIOS OPCIONALES

| DESCRIPTION                                                                           | Ref.    |                                   |
|---------------------------------------------------------------------------------------|---------|-----------------------------------|
| Zinc plated steel clamps - Bridas acero cincado (1)                                   | Q0338   | 2 pcs                             |
| Stainless steel clamps - Bridas acero inoxidable (1)                                  | Q0347   | 2 pcs                             |
| Quick opening stainless steel clamps - Bridas acero inoxidable de apertura rápida (2) | Q0348   | 2 pcs                             |
| Anti vandalic PC clamp - Bridas PC anti vandállicas (3)                               | Q0155   | 2 pcs                             |
| ABS clamps - Bridas ABS (4)                                                           | Q0334   | 2 pcs                             |
| Steel cable suspension - Suspensión cable de acero                                    | Q0349   | 1900mm   2 pcs                    |
| Pole fixing - Fijación a báculo                                                       | Q0978   | ø 60 mm                           |
| Exit sign - Señal de salida                                                           | Q0310 ↓ | 20m. visibility - visibilidad 20m |